

Vector™ V500 Smart Antenna

Multi-Frequency, Multi-GNSS Vector Compass



key features

- Simple all-in-one RTK-capable
- Multi-frequency GPS/GLONASS/BeiDou/Galileo/QZSS/IRNSS
- Athena™ RTK and Atlas® L-band capable
- Fully rugged solution for the harshest environments

The Vector V500 is Hemisphere GNSS' all-in-one multi-frequency, multi-GNSS smart antenna which provides RTK-level position and precise heading. This rugged design is sealed for the harshest environments and is a great solution for professional marine and other challenging applications.

The all-in-one V500 combines simple installation with consistent and precise heading accuracy and RTK positioning.



Precision@HGNS.com
www.HGNS.com

Vector V500 Smart Antenna

GNSS Receiver Specifications

Receiver Type:	Vector GNSS RTK Receiver	
Signals Received:	GPS, GLONASS, BeiDou, Galileo, QZSS ⁷ , IRNSS ⁷ and Atlas ⁶	
Channels:	744	
GPS Sensitivity:	-142 dBm	
SBAS Tracking:	3-channel, parallel tracking	
Update Rate:	10 Hz standard, 50 Hz optional	
Timing (1PPS)		
Accuracy:	20 ns	
Rate of Turn:	100°/s maximum	
Cold Start:	40 s (no almanac or RTC)	
Warm Start:	20 s typical (almanac and RTC)	
Hot Start:	5 s typical (almanac, RTC and position)	
Heading Fix:	10 s typical (Hot Start)	
Antenna Input Impedance:	50 Ω	
Maximum Speed:	1,850 mph (999 kts)	
Maximum Altitude:	18,288 m (60,000 ft)	
Differential Options:	SBAS, Atlas (L-band), RTK	

Positioning Accuracy

2DRMS (95%)	Horizontal	Vertical
RTK ¹ :	8 mm + 1 ppm	15 mm + 2 ppm
SBAS (WAAS) ² :	0.6 m	
Autonomous, no SA ² :	2.4 m	
Atlas H10 (L-band) ⁶ :	0.08 m	
Atlas H30 (L-band) ⁶ :	0.3 m	
Atlas Basic (L-band) ⁶ :	0.5 m	
Heading Accuracy:	< 0.2° rms	
Pitch/Roll Accuracy (RMS):	1°	
Heave Accuracy (RMS):	30 cm (DGPS) ⁶ , 10 cm rms (RTK) ⁶	

L-Band Receiver Specifications

Channels:	1525 to 1560 MHz
Sensitivity:	-130 dBm
Channel Spacing:	5 kHz
Satellite Selection:	Manual or Automatic
Reacquisition Time:	15 sec (typical)
Processor:	DSP for demodulation and protocol decoding module provides processing for the differential algorithms

Communications

Ports:	1x full-duplex RS-232/RS-422, 1x RS232, 2x CAN, 1x Ethernet
Baud Rates:	4800 - 115200
Radio Interfaces:	Bluetooth 2.0 (Class 2), Wi-Fi 2.4 GHz
Correction I/O Protocol:	Atlas, Hemisphere GNSS proprietary, RTCM v2.3 (DGPS), RTCM v3 (RTK), CMR, CMR+ ¹
Data I/O Protocol:	NMEA 0183, Hemisphere GNSS binary
Timing Output:	1PPS, CMOS, active low, falling edge sync, 10 kΩ, 10 pF load
Event Marker Input:	CMOS, active low, falling edge sync, 10 kΩ, 10 pF load
Heading Warning I/O:	Open relay system indicates invalid heading

Power

Input Voltage:	9 - 36 VDC with reverse polarity operation
Power Consumption:	TBD
Current Consumption:	TBD
Reverse Polarity Protection:	Yes

Environmental

Operating Temperature:	-40°C to +70°C (-40°F to +158°F)
Storage Temperature:	-40°C to +85°C (-40°F to +185°F)
Humidity:	95% non-condensing
Vibration:	IEC60945 Section 8.7
EMC:	IEC60945
IMO Wheelmark Certification:	FCC part 15 Subpart B, CISPR32
Enclosure:	No IP69

Mechanical

Dimensions:	66.3L x 20.9 W x 14.6 H cm
Weight:	2.1kg
Status Indications (LED):	Power, GNSS Lock, Heading
Power/Data Connector:	22 pin environmentally sealed

Aiding Devices

Gyro:	Provides smooth heading, fast heading reacquisition and reliable < 0.5° per min heading for periods up to 3 min. when loss of GPS has occurred ⁴
Tilt Sensors:	Provide pitch, roll data and assist in fast start-up and reacquisition of heading solution

1 Depends on multipath environment, number of satellites in view, satellite geometry, no SA, and ionospheric activity

2 Depends on multipath environment, number of satellites in view, WAAS coverage and satellite geometry

3 Depends on multipath environment, number of satellites in view, satellite geometry, baseline length (for differential services), and ionospheric activity


4 Based on a 40 second time constant

5 Hemisphere GNSS proprietary

6 Requires a Hemisphere GNSS subscription

7 With future firmware upgrade and activation

Authorized Distributor:

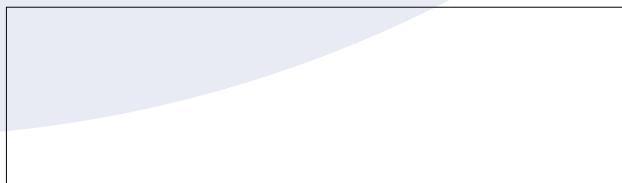

Copyright Hemisphere GNSS, Inc. All rights reserved. Specifications subject to change without notice.

Hemisphere GNSS, Athena, Atlas, and Vector are trademarks of Hemisphere GNSS, Inc. Rev. 02/18



Hemisphere GNSS, Inc.
8515 E. Anderson Drive
Scottsdale, AZ, USA 85255

Toll-Free: +1 (855) 203-1770
Phone: +1 (480) 348-6380
Fax: +1 (480) 270-5070
Precision@HGNS.com
www.HGNS.com