

Vector™ V1000 GNSS Receiver

High-Precision Positioning & Heading for Professional Marine Systems

key features

- Athena™ RTK and Atlas® L-band capable
- Extremely accurate heading (to 0.01° RMS)
- Multi-frequency GPS/ GLONASS/BeiDou/Galileo/ QZSS/IRNSS
- Purpose-built for the most challenging environments
- Supports Ethernet, CAN, Serial, Bluetooth, and Wi-Fi
- Powerful webUI accessed via Wi-Fi plus a 128x64 display and 10 multi-color LEDs



The Vector V1000 is Hemisphere GNSS' premiere multi-GNSS, multi-frequency receiver designed specifically for the professional marine market. Providing precise heading, Athena RTK positioning, and full Atlas capability, its rugged design is compliant to IP67, MIL-STD810G, MIL-STD-202F, and IEC 60068-2 standards.

The V1000 supports antenna separations up to 10 meters, offering heading accuracy to 0.01 degrees RMS in addition to RTK position accuracy and full support for Hemisphere GNSS' Atlas worldwide L-band corrections.



Precision@HGNS.com
www.HGNS.com

Vector V1000 GNSS Receiver

GNSS Receiver Specifications

Receiver Type:	Vector GNSS RTK Receiver	
Signals Received:	GPS, GLONASS, BeiDou, Galileo, QZSS ¹ , IRNSS ⁴ and Atlas ³	
Channels:	744	
GPS Sensitivity:	-142 dBm	
SBAS Tracking:	3-channel, parallel tracking	
Update Rate:	10 Hz standard, 50 Hz optional	
Timing (1PPS)		
Accuracy:	20 ns	
Rate of Turn:	100°/s maximum	
Cold Start:	40 s (no almanac or RTC)	
Warm Start:	20 s typical (almanac and RTC)	
Hot Start:	5 s typical (almanac, RTC and position)	
Heading Fix:	10 s typical (Hot Start)	
Antenna Input		
Impedance:	50 Ω	
Maximum Speed:	1,850 mph (999 kts)	
Maximum Altitude:	18,288 m (60,000 ft)	
Differential Options:	SBAS, Atlas (L-band), RTK	

Positioning Accuracy

2DRMS (95%)	Horizontal	Vertical
RTK ¹ :	8 mm + 1 ppm	15 mm + 2 ppm
SBAS (WAAS) ² :	0.6 m	
Autonomous, no SA ² :	2.4 m	
Atlas H10 (L-band) ³ :	0.08 m	
Atlas H30 (L-band) ³ :	0.3 m	
Atlas Basic (L-band) ³ :	0.5 m	
Heading Accuracy:	$< 0.2^\circ$ rms @ 0.5 m antenna separation $< 0.1^\circ$ rms @ 1.0 m antenna separation $< 0.05^\circ$ rms @ 2.0 m antenna separation $< 0.02^\circ$ rms @ 5.0 m antenna separation $< 0.01^\circ$ rms @ 10.0 m antenna separation	
Pitch/Roll Accuracy (RMS):	1°	
Heave Accuracy (RMS):	30 cm (DGPS) ³ , 10 cm (Atlas) ³	

L-Band Receiver Specifications

Channels:	1525 to 1560 MHz
Sensitivity:	-130 dBm
Channel Spacing:	5 kHz
Satellite Selection:	Manual or Automatic
Reacquisition Time:	15 sec (typical)
Processor:	DSP for demodulation and protocol decoding module provides processing for the differential algorithms

Communications

Ports:	1x CAN, 1x Ethernet, 1x 12-pin multi-purpose (RS232, RS422, CAN, 1PPS) 4800 - 115200 Bluetooth 2.0 (Class 2), Wi-Fi 2.4 GHz
Baud Rates:	
Radio Interfaces:	
Correction I/O Protocol:	Atlas, Hemisphere GNSS proprietary, RTCM v2.3 (DGPS), RTCM v3 (RTK), CMR, CMR+ ¹ NMEA 0183, Hemisphere GNSS binary 1PPS, CMOS, active low, falling edge sync, 10 kΩ, 10 pF load
Data I/O Protocol:	
Timing Output:	CMOS, active low, falling edge sync, 10 kΩ, 10 pF load
Event Marker Input:	

Environmental

Operating Temperature:	-40°C to +70°C (-40°F to +158°F)
Storage Temperature:	-40°C to +85°C (-40°F to +185°F)
Humidity:	95% non-condensing
Mechanical Shock:	ISO 16750-3 / MIL-STD-202F / EP455
EMC:	EN 13309 Construction Machinery ISO 13766 Earth Moving

IMO Wheelmark Certification:	No
Enclosure:	IP67

Mechanical

Dimensions:	No mounting Plate 23.2 L x 16.5 W x 7.9 H (cm) 9.1 L x 6.5 W x 3.1 H (in) With Mounting Plate 23.2 L x 21.4 W x 8.3 H (cm) 9.1 L x 8.4 W x 3.3 H (in)
Display:	128 x 64 Resolution
Status Indications (LED):	Power, Primary Antenna, Secondary Antenna, Heading, Quality, Atlas, Bluetooth, Wi-Fi, CAN, Ethernet
Power/Data Connector:	M12 Power, CAN, 12-pin multi-purpose

Aiding Devices

Gyro:	Provides fast reacquisition and reliable heading for short periods when loss of GNSS has occurred
Tilt Sensors:	Provide pitch, roll data and assist in fast start-up and reacquisition of heading solution

¹ Depends on multipath environment, number of satellites in view, satellite geometry, no SA, and ionospheric activity

² Depends on multipath environment, number of satellites in view, WAAS coverage and satellite geometry


³ Requires a subscription

⁴ Depends on multipath environment, number of satellites in view, satellite geometry, baseline length (for differential services), and ionospheric activity

⁵ Hemisphere GNSS proprietary

⁶ With future firmware upgrade and activation

Authorized Distributor:

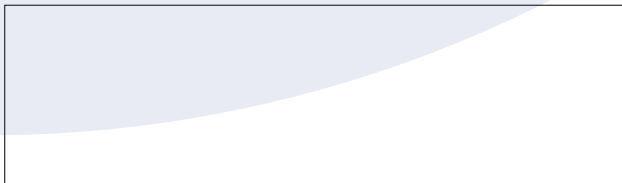

Copyright Hemisphere GNSS, Inc. All rights reserved. Specifications subject to change without notice.

Hemisphere GNSS, Athena, Atlas, and Vector are trademarks of Hemisphere GNSS, Inc. Rev. 02/18



Hemisphere GNSS, Inc.
8515 E. Anderson Drive
Scottsdale, AZ, USA 85255

Toll-Free: +1 (855) 203-1770
Phone: +1 (480) 348-6380
Fax: +1 (480) 270-5070
Precision@HGNSS.com
www.HGNSS.com